

- e. Sand mound must be covered with a minimum topsoil depth of 12 inches. The soil cap at the center of the mound must be crowned to 18 inches. Topsoil and soil cap must be a sandy loam, loamy sand, or silt loam.
- f. Mound should be protected to prevent damage caused by vehicular, livestock, or excessive pedestrian traffic. The toe of the mound must be protected from compaction.
- g. Sand fill area must be as long and narrow as practical, with plan view dimension G exceeding dimension F (Figure 4-32).

Figure 4-32 can be used with Table 4-25 (sand mound design checklist) for flat and sloped sites.

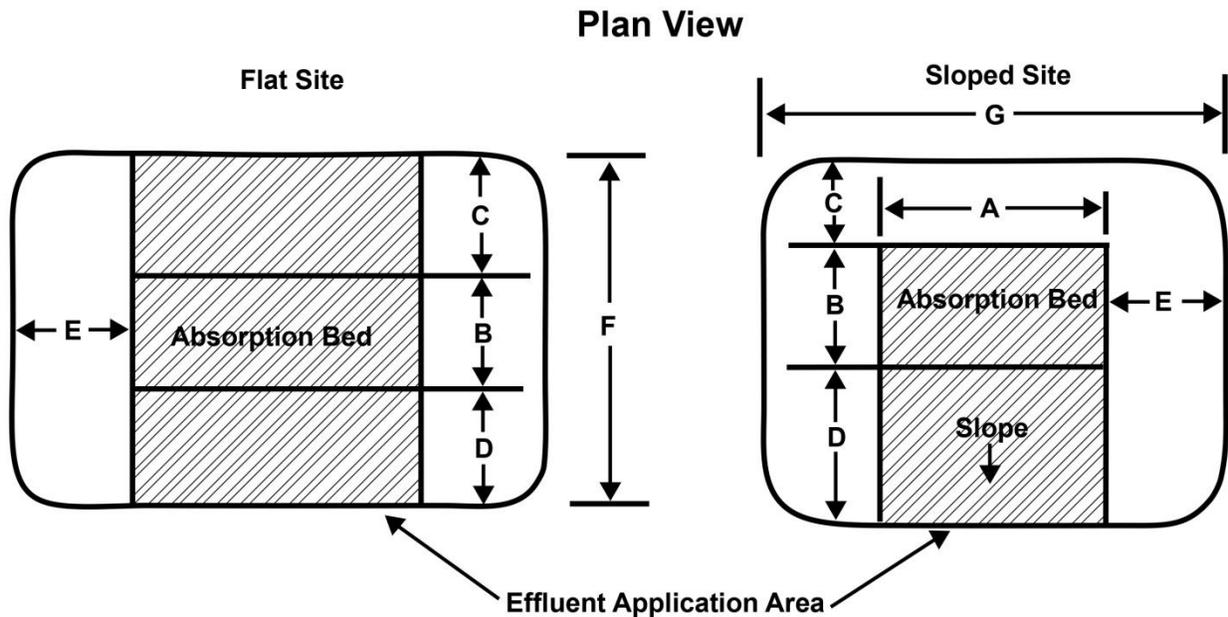


Figure 4-32. Design illustrations for sand mound installation on flat and sloped sites (use with sand mound design checklist).