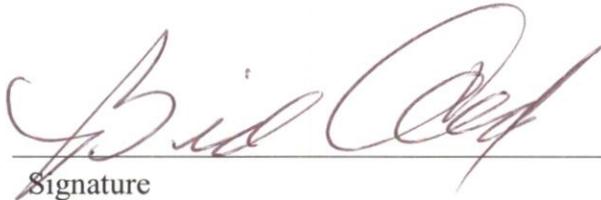



**Idaho Department of Environmental Quality
Reuse Permit
M-079-03
(Previous Permit No. LA-000079-02)**

The **City of Filer** (hereafter "permittee") is hereby authorized to construct, install, and operate a reuse facility in accordance with (1) this permit; (2) IDAPA 58.01.17, "Recycled Water Rules"; (3) an approved plan of operation; and (4) all other applicable federal, state, and local laws, statutes, and rules. This permit is effective from the date of signature and expires on August 13, 2019.


Signature


Date

Bill Allred

Regional Administrator
Twin Falls Regional Office
Idaho Department of Environmental Quality

Department of Environmental Quality
Twin Falls Regional Office
650 Addison Avenue West, Suite 110
Twin Falls, Idaho 83301
(208) 736-2190

Scanned

This page intentionally left blank for correct double-sided printing.

Table of Contents

1. Commonly Used Acronyms and Abbreviations	5
2. Facility Information	6
3. Compliance Schedule for Required Activities.....	7
4. Permit Limits and Conditions	11
4.1 Management Unit Descriptions	11
4.2 Hydraulic Loading Limits.....	11
4.3 Constituent Loading Limits	12
4.4 Management Unit Buffer Zones	12
4.5 Other Permit Limits and Conditions.....	13
5. Monitoring Requirements	16
5.1 Recycled Water and Supplemental Irrigation Water Sampling, and Analyses	16
5.1.1 Constituent Monitoring.....	16
5.1.2 Management Unit and Other Flow Monitoring.....	17
5.2 Ground Water Monitoring	18
5.2.1 Ground Water Monitoring Point Descriptions	18
5.2.2 Ground Water Monitoring, Sampling, and Analyses	18
5.3 Soil Monitoring.....	19
5.3.1 Soil Monitoring Unit Descriptions	19
5.3.2 Soil Monitoring, Sampling, and Analyses.....	19
5.4 Plant Tissue Monitoring.....	20
5.4.1 Crop Harvest Monitoring.....	20
5.4.2 Plant Tissue Monitoring	20
5.5 Lagoon Information	21
6. Reporting Requirements	21
6.1 Annual Report Requirements.....	21
6.1.1 Due Date	21
6.1.2 Required Contents	21
6.1.3 Submittal.....	22
6.2 Emergency and Noncompliance Reporting	23
7. Reserved.....	24
8. Standard Permit Conditions	24
9. General Permit Conditions.....	26
9.1 Operations	26
9.1.1 Backflow Prevention	26
9.1.2 Restricted to Premises	26
9.1.3 Health Hazards, Nuisances, and Odors Prohibited.....	27
9.1.4 Solids Management	27
9.1.5 Temporary Cessation of Operations and Closure (IDAPA 58.01.17.801).....	28
9.1.6 Plan of Operation (IDAPA 58.01.17.300.05).....	28
9.1.7 Ten-Year Lagoon Seepage Testing (IDAPA 58.01.16.493.02)	28
9.1.8 Ground Water Quality (IDAPA 58.01.11)	29
9.2 Administrative.....	29
9.2.1 Permit Modification (IDAPA 58.01.17.700).....	29

9.2.2	Permit Transferable (IDAPA 58.01.17.800)	29
9.2.3	Permit Revocation (IDAPA 58.01.17.920)	29
9.2.4	Violations (IDAPA 58.01.17.930).....	30
9.2.5	Severability	30
10.	Other Applicable Laws	30
10.1	Owner Responsibilities for Well Use and Maintenance	30
10.1.1	Well Use	30
10.1.2	Well Maintenance.....	30
10.1.3	Wells Posing a Threat to Human Health and Safety or Causing Contamination of the Ground Water Resource	31
11.	Site Maps	32
11.1	Figure 1. Site Location Map (prepared by DEQ)	32
11.2	Figure 2. Reuse Site and Lagoons (prepared by DEQ).....	32

1. Commonly Used Acronyms and Abbreviations

DEQ	Idaho Department of Environmental Quality
Director	Director of the Idaho Department of Environmental Quality or designee unless otherwise specified
EPA	Environmental Protection Agency
E _i	irrigation efficiency
FM	flow measurement or monitoring description or identifier
GW	prefix for ground water reporting serial number
IDAPA	Idaho Administrative Procedures Act
IDWR	Idaho Department of Water Resources
IWR	irrigation water requirement – any combination of wastewater and supplemental irrigation water applied at rates commensurate to the moisture requirements of the crop, and calculated monthly during the growing season (GS). The equation used to calculate the IWR is: $IWR = P_{def}/E_i$
LG	prefix for lagoon reporting serial number
MG	million gallons
mg/kg	milligram per kilogram
mg/L	milligram per liter
MU	prefix for management unit reporting environmental serial number
NPDES	National Pollution Discharge Elimination System
P _{def}	precipitation deficit - is synonymous with the net irrigation water requirement of the crop and for the purposes of this permit can be found at the following website http://data.kimberly.uidaho.edu/ETIdaho/
PO	plan of operation
QAPP	quality assurance project plan
SU	prefix for soil monitoring unit reporting serial number
SW	prefix for supplemental irrigation water reporting environmental serial number
WW	prefix for wastewater reporting environmental serial number

2. Facility Information

Information Type	Information Specific to This Permit
Type of recycled water	Municipal, Class C and B facility
Method of treatment	Primary treatment, membrane bioreactor, ultraviolet disinfection, and slow rate recycled water land application
System Classification	Wastewater Class II facility & Wastewater Land Application
Facility location	4030 North 2200 East Filer, Idaho, 83328 Twin Falls County
Legal Description (Reuse Site)	Township 10S, Range 16E, Section 5
Facility mailing address	P.O. Box 140 Filer, Idaho, 83328 Twin Falls County
Facility responsible official and authorized representative	<p>Responsible Official: Bob Templeman, Mayor Telephone: (208) 326-5000 Fax: (208) 326-5002</p> <p>Authorized Representative: Joseph Baratti, Responsible Charge Operator – Reuse System Telephone: (208) 326-5000 Fax: (208) 326-5002 Cell: (208) 316-2114 joeb@filertel.com</p>
Other facility contact	John Hurley, Responsible Charge Operator – Treatment Facility Telephone: (208) 326-5000 Fax: (208) 326-5002 Cell: (208) 308-8772 filerwwtp@gmail.com
Ground Water	Regional Aquifer: 35 – 75 feet deep, Northeast flow, Public/Domestic and Agriculture
Surface Water	Cedar Draw Creek located approximately three fourths (0.75) of a mile west of the reuse facility, Agriculture. West Side Canal located approximately 0.25 miles east of the reuse facility, Agriculture. An irrigation canal tributary runs diagonally between the northeast and southeast fields and along the northern edge of west field
Public Water Supplies	Public Water Supply Wells are located approximately three fourths (0.75) of a mile southeast and southwest of the reuse site

3. Compliance Schedule for Required Activities

Compliance Activity (CA) Number and Completion Due Date	Compliance Activity Description
CA-079-01 Twenty Four (24) months after permit issuance	Plan of Operation (PO): The permittee shall submit an updated PO to the Idaho Department of Environmental Quality (DEQ) for review and approval. The PO shall comply with requirements stated in IDAPA 58.01.17.300.05, "Recycled Water Rules; Reuse Facility Operation and Maintenance Manual or Plan of Operations" and shall address all the applicable items in the latest revision of the Plan of Operation Checklist in the DEQ Guidance for Reclamation and Reuse of Municipal and Industrial Wastewater. The PO shall be updated as needed to reflect current operations. The permittee shall notify DEQ of material changes to the PO and copies shall be kept on site and made available to DEQ upon request.

<p>Compliance Activity (CA) Number and Completion Due Date</p>	<p>Compliance Activity Description</p>
<p>CA-079-02 Six (6) months after permit issuance</p>	<p>Quality Assurance Project Plan (QAPP): The permittee shall prepare and implement a QAPP that incorporates all monitoring and reporting required by this permit. A copy of the QAPP along with written notice that the permittee has implemented the QAPP shall be provided to DEQ.</p> <p>The QAPP shall be designed to assist in planning for the collection, analysis, and reporting of all monitoring in support of this permit and in explaining data anomalies when they occur. At a minimum, the QAPP must include the following:</p> <ol style="list-style-type: none"> 1. Details on the number of measurements, number of samples, type of sample containers, preservation of samples, holding times, analytical methods, analytical detection, and quantitation limits for each target compound, type and number of quality assurance field samples, precision and accuracy requirements, sample preparation requirements, sample shipping methods, and laboratory data delivery requirements. 2. Maps indicating the location of each monitoring, and sampling point. 3. Qualification and training of personnel. 4. Names, addresses, and telephone numbers of the laboratories used by or proposed to be used by the permittee. 5. Example formats and tables that will be used by the permittee to summarize and present all data in the annual report. <p>The format and content of the QAPP should adhere to the recommendations and references in the Quality Assurance and Data Processing sections of the DEQ Guidance.</p> <p>The permittee shall amend the QAPP whenever there is a modification in sample collection, sample analysis, or other procedure addressed by the QAPP. The permittee shall notify DEQ of material changes to the QAPP and copies shall be kept on site and made available to DEQ upon request.</p> <p>If the City decides to perform all the permit required laboratory analysis, in their in-house laboratory prior to the end of this permit cycle, the QAPP will need to be updated to include the in-house laboratory prior to the City taking over the laboratory analysis required by the permit. In addition, all city personnel doing laboratory analysis must acquire the necessary laboratory analyst licensing as specified in the Idaho Bureau of Occupational Licensing rules (IDAPA 24.05.01) prior to the City's acceptance of all monitoring analysis. Split samples will need to be taken on a portion of the permit monitoring samples and sent to a third party laboratory to confirm the City's laboratory analysis results and testing procedures.</p>

<p>Compliance Activity (CA) Number and Completion Due Date</p>	<p>Compliance Activity Description</p>
<p>CA-079-03 Prior to any land application of recycled water or construction of recycled water infrastructure</p>	<p>West Field Plans and Specifications: The Permittee shall prepare and submit to DEQ for review and approval plans and specifications for the new expansion acreage (west field), MU-079-04, prior to any construction activities associated with the recycled water distribution system for this field. The plans and specifications shall meet the requirements specified in IDAPA 58.01.16, "Wastewater Rules" and shall be prepared under the supervision and bear the seal of an Idaho licensed professional engineer. Construction of the distribution system shall also be observed by or be under the direction of an Idaho licensed professional engineer.</p> <p>The plans and specifications shall include a detailed discussion and laboratory test results associated with baseline soil monitoring for the west field. The baseline soil monitoring shall include all soil constituents of concern listed in the permit for all monitoring units including iron and manganese. Background monitoring well constituent test results and a discussion of these results shall also be included as part of the plans and specifications document.</p> <p>Land application of recycled water will not be allowed on the west field, MU-079-04, until after the plans and specifications and all associated construction activities for this field have been approved by DEQ.</p>
<p>CA-079-04 Twelve (12) months after permit issuance</p>	<p>Monitoring Well Network Assessment: The Permittee shall submit for DEQ review and approval a monitoring well network assessment for the entire site that shall include a monitoring well system around the lagoon site as required in IDAPA 58.01.16.493.09.c.v and the west field. The monitoring well network assessment shall address the well locations, and whether or not existing domestic wells can be used as up-gradient or down-gradient monitoring wells, or new wells need to be installed based on these locations and ground water flow directions. The monitoring well network assessment shall address well depth, well seal, verify that the well is completed in the uppermost aquifer, and meet the requirements for well construction specified in IDAPA 37.03.09, "Well Construction Standards Rules".</p>
<p>CA-079-05 Twelve (12) months after permit issuance</p>	<p>Well Location Acceptability Analysis: The Permittee shall submit for DEQ review and approval a well location acceptability analysis (WLAA) that evaluates the domestic well located northeast of the northeast land application field, MU-079-02. This domestic well is approximately 250 feet northeast of the land application site and pump back station. The evaluation shall incorporate ground water data, such as ground water flow direction, time of travel, and ground water quality analysis, to determine an appropriate buffer zone distance from the land application site. The ground water quality analysis shall be taken over a duration that includes both the growing and non-growing seasons to determine the effects of the land application fields and equipment on the water quality in the well.</p> <p>If it is determined that a reduced buffer zone is recommended (less than 500 feet), the Permittee shall submit a buffer zone waiver request to DEQ for review and approval.</p>

Compliance Activity (CA) Number and Completion Due Date	Compliance Activity Description										
<p>CA-079-06 As specified</p>	<p>Seepage Testing: The following table shows the date by which the permittee shall complete seepage testing on the specified lagoons:</p> <table border="1" data-bbox="483 485 1377 715"> <thead> <tr> <th>Lagoon:</th> <th>Seepage Test Due Date:</th> </tr> </thead> <tbody> <tr> <td>Lagoon no. 1</td> <td>June 30, 2016 Required only if in use</td> </tr> <tr> <td>Lagoon no. 2</td> <td>June 30, 2016</td> </tr> <tr> <td>Lagoon no. 3</td> <td>June 30, 2016</td> </tr> <tr> <td>Lagoon no. 4</td> <td>June 30, 2016</td> </tr> </tbody> </table> <p>Submit to DEQ for review and approval a proposed schedule and procedure for performing the required seepage tests at least 42 days prior to the planned seepage test. Seepage test procedures are available at: http://www.deq.idaho.gov/water-quality/wastewater/lagoon-seepage-testing.aspx The seepage test procedures shall be sealed by the Idaho licensed professional engineer or professional geologist in responsible charge for the test.</p> <p>Seepage tests shall be completed in accordance with the procedures approved by DEQ. The seepage test report shall be sealed by the person in responsible charge and submitted within 90 days after completion of the seepage test.</p>	Lagoon:	Seepage Test Due Date:	Lagoon no. 1	June 30, 2016 Required only if in use	Lagoon no. 2	June 30, 2016	Lagoon no. 3	June 30, 2016	Lagoon no. 4	June 30, 2016
Lagoon:	Seepage Test Due Date:										
Lagoon no. 1	June 30, 2016 Required only if in use										
Lagoon no. 2	June 30, 2016										
Lagoon no. 3	June 30, 2016										
Lagoon no. 4	June 30, 2016										
<p>CA-079-07 Twelve (12) months prior to permit expiration</p>	<p>Pre-Application Workshop: If the permittee intends to continue operating the reuse facility beyond the expiration date of this permit, the permittee shall contact DEQ and schedule a pre-application workshop to discuss the compliance status of the facility and the content required for the reuse permit application package.</p>										
<p>CA-079-08 180 days prior to permit expiration</p>	<p>Renewal Permit Application: The permittee shall submit to DEQ a complete permit renewal application package, which fulfills the requirements specified at the pre-application workshop identified in CA-079-07.</p>										

4. Permit Limits and Conditions

4.1 Management Unit Descriptions

Serial Number	Description	Irrigation System Type and Irrigation Efficiency	Maximum ^a Acres Allowed
MU-079-02	Northeast field (existing acreage north of canal)	Flood irrigation: (Ei = 0.65) Handset: (Ei = 0.75)	22
MU-079-03	Southeast field (existing acreage south of canal)	Flood irrigation: (Ei = 0.65)	18
MU-079-04	West field (expansion acreage)	Flood irrigation: (Ei = 0.65)	30
Total acreage			70

- a. Maximum acres represent the total permitted acreage of the MU as provided by the permittee. If the permittee uses less acreage in any season or year, then loading rates shall be presented and compliance shall be determined based on the actual acreage utilized during each season or year.

4.2 Hydraulic Loading Limits

Serial Number	Growing Season Hydraulic Loading	Non-growing Season Maximum Hydraulic Loading ^b
MU-079-02 MU-079-03 MU-079-04	Substantially at the irrigation water requirement (IWR) ^a	Non-growing season hydraulic loading not allowed

- a. For compliance purposes, the source of P_{def} data used to calculate the IWR shall be specified in the PO.
- b. Record daily, as necessary, abnormal conditions as a result of non-growing season application including ponding, excessive ice buildup, or runoff from the permitted site.

4.3 Constituent Loading Limits

Serial Number	Constituent Loading (from all sources)			
	Nitrogen (lb/acre)	Salt (NVDS) (lb/acre)	COD growing season (lb/acre-day) ^a	COD non-growing season (lb/acre-day) ^a
MU-079-02 MU-079-03 MU-079-04	150% of typical crop uptake ^b	No limit	50	Not Allowed

- a. COD limits are expressed in pounds per acre per day (lb/acre-day) based on a seasonal average.
- b. Typical crop uptake is the median constituent crop uptake from the 3 most recent years the crop has been grown. For crops having less than 3 years of on-site crop uptake data, other crop yield data or nutrient content values may only be used if approved in writing by DEQ in advance of use. If written approval is not provided by DEQ, compliance with the 150% nitrogen loading limit shall be determined by comparing the current year nitrogen loading to the current year nitrogen uptake.

4.4 Management Unit Buffer Zones

Serial Number	Recycled Water Class	Type of Irrigation	Buffer Distances (in feet) from Management Units					
			Public Water Supplies	Private Water Supplies	Inhabited Dwellings	Permanent and Intermittent Surface Water	Irrigation Ditches and Canals	Areas Accessible to the Public
MU-079-02 MU-079-03 MU-079-04	B	Furrow	1,000	500	50	100	20	0
		Sprinkler			100		50	
	C	Furrow	1,000	500	50	100	20	0
		Sprinkler			300		50	

4.5 Other Permit Limits and Conditions

Category	Permit Limits and Conditions
Growing season	April 1 through October 31 (214 days)
Non-growing season	No application allowed (November 1 through March 31)
Reporting year for annual loading rates	November 1 through October 31
Operator licensure required	The wastewater treatment facility and reuse systems shall be operated by personnel certified and licensed in the state of Idaho wastewater training program at the operator class level specified in IDAPA 58.01.16.203 of the <i>Wastewater Rules</i> . A copy of the DEQ Public Wastewater System Operator Licensure Record Form, for the personnel that will be operating the system, shall be submitted to DEQ to demonstrate compliance with this requirement.
Disinfection limits in recycled water	Class B: The median number of total coliform organisms shall not exceed 2.2 CFU/100 mL, as determined from the bacteriological results of the last 7 days for which analyses have been completed. No sample shall exceed 23 CFU/100 mL in any confirmed sample, as determined from the bacteriological results of the last 7 days for which analyses have been completed.
	Class C: The median number of total coliform organisms shall not exceed 23 CFU/100 mL, as determined from the bacteriological results of the last 5 days for which analyses have been completed. No sample shall exceed 230 CFU/100 mL in any confirmed sample, as determined from the bacteriological results of the last 5 days for which analyses have been completed.
Disinfection requirements	Class B recycled water shall be disinfected by either: <ul style="list-style-type: none"> • A chlorine disinfection process that provides a total chlorine at the point of compliance of not less than one (1) mg/L after a minimum contact time of thirty (30) minutes at peak flow, or • An alternate process that is comparable. The UV system used by the City meets these requirements. It is recommended that the recycled water also be disinfected following storage (IDAPA 58.01.17.601.02.a.iii.(2)).
	Class C – No additional requirements beside the total coliform requirements.

Category	Permit Limits and Conditions
Wastewater Treatment System Effluent, Turbidity Limit, Nephelometric Turbidity Units (NTU), prior to disinfection	<p>Class B</p> <ul style="list-style-type: none"> • Daily arithmetic mean shall not exceed 5 NTU • Turbidity shall not exceed 10 NTU at any time • One (1) inline, continuously monitoring, recording turbidimeter is required for each treatment train after filtration and prior to disinfection
	Class C – None
Crop or vegetation restrictions	<p>Class B: No restrictions on food crops including all edible food crops. Not allowed on parks, playgrounds, and school yards during periods of use. Not allowed for residential landscaping. Refer to the Recycled Water Rules, IDAPA 58.01.17.602.02</p>
	<p>Class C: Restrictions on food crops, application not allowed on all edible food crops. Not allowed on parks, playgrounds, school yards, golf courses, residential landscaping, or commercial campus irrigation. Refer to the Recycled Water Rules, IDAPA 58.01.17.602.02</p>
Construction Plans	<p>Pursuant to Idaho Code §39-118, IDAPA 58.01.16, and IDAPA 58.01.17, detailed plans and specifications shall be submitted to DEQ for review and approval prior to construction, modification, or expansion of any wastewater treatment, storage, conveyance structures, or reuse facility. Inspection requirements shall be satisfied and within 30 days of completion of construction and the permittee shall submit as-built plans or a letter from an Idaho Professional Engineer certifying the facilities or structures were constructed in substantial accordance with the approved plans and specifications.</p>
Grazing	<p>Prior to grazing, the permittee shall submit a grazing management plan to DEQ and receive written approval from DEQ.</p>
Posting	<p>For Class B: Signs shall read "Caution: Recycled Water—Do Not Drink," or equivalent signage both in English and Spanish. Signs to be posted every 500 feet and at each corner of the outer perimeter of the buffer zone(s) of the site.</p>
	<p>For Class C: Signs shall read "Warning: Recycled Water—Do Not Enter," or equivalent signage both in English and Spanish. Signs to be posted every 500 feet and at each corner of the outer perimeter of the buffer zone(s) of the site.</p>

Category	Permit Limits and Conditions
Pond Fencing and Signage	The pond area shall be enclosed with adequate fence to prevent entering of livestock and discourage trespassing. Appropriate permanent signs shall be provided along the fence around the pond to designate the nature of the facility and advise against trespassing. At least one (1) sign shall be provided on each side of the site and one (1) for every five hundred (500) feet of its perimeter (IDAPA58.01.16.493.09.c.i,iii).
Backflow prevention and testing requirements	Backflow prevention is required to protect surface water and ground water from an unauthorized discharge of recycled water or wastewater. Refer to section 9.1.1 of this permit.
Records retention requirements	Keep records generated to meet the requirements of this permit for the duration of this permit, including administrative extensions, plus 2 years.

5. Monitoring Requirements

5.1 Recycled Water and Supplemental Irrigation Water Sampling, and Analyses

5.1.1 Constituent Monitoring

Monitoring Point Serial Number and Location	Sample Description	Recycled Water Class	Sample Type and Frequency	Constituents (Units in mg/L Unless Otherwise Specified)	
WW-079-01 Discharge point of recycled water to land application	Recycled water to MU-079-02, MU-079-03, and MU-079-04 (during periods of recycled water land application)	B	Grab / monthly	-Total Kjeldahl nitrogen -Nitrite + nitrate-nitrogen -Total dissolved solids (TDS) -Volatile dissolved solids (VDS) -pH -COD -Total phosphorus	
		C			
		B	Grab / daily		-Total coliform organisms /100 mL
		C	Grab / once weekly		

5.1.2 Management Unit and Other Flow Monitoring

Monitoring Point Serial Number and Location	Sample Description	Sample Type and Frequency	Measured Parameter
MU-079-02 MU-079-03 MU-079-04 Magnetic flow meter downstream of storage lagoon cells #2 and #4	Effluent flow from the storage lagoons to the land application sites	–Daily meter reading –Monthly compilation of data	Flow (MG/month)
FM-079-01 Magnetic flow meter at the head works	Influent flow to the treatment facility	–Daily meter reading –Monthly compilation of data	Flow (MG/month)
FM-079-02 Magnetic flow meter downstream of the UV system	Effluent flow from the treatment facility to the storage lagoons	–Daily meter reading –Monthly compilation of data	Flow (MG/month)

5.2 Ground Water Monitoring

5.2.1 Ground Water Monitoring Point Descriptions

Monitoring Point Serial Number	Common Designation	Well Type	Gradient Location
GW-079-01	MW 1	Monitoring well	Side-gradient
GW-079-02	MW 2	Monitoring well	Down-gradient
GW-079-03	MW 3	Monitoring well	Up-gradient
GW-079-04	MW 4	Monitoring well	Down-gradient
GW-079-05	MW 5	Monitoring well	Up-gradient
GW-079-06	MW 6	Monitoring well	Side-gradient

5.2.2 Ground Water Monitoring, Sampling, and Analyses

Monitoring Point Serial Number	Sampling Point Description	Sample Type and Frequency	Constituents (Units in mg/L Unless Otherwise Specified)
GW-079-01 GW-079-02 GW-079-03 GW-079-04 GW-079-05 GW-079-06	Monitoring wells	Grab sample/twice annually: April and October	-Depth to ground water (feet) -Static water elevation (feet) -Total dissolved solids (TDS) -Nitrate-nitrogen -Chloride -Sulfate

5.3 Soil Monitoring

5.3.1 Soil Monitoring Unit Descriptions

Monitoring Point Serial Number	Description	Associated Management Unit
SU-079-02	Northeast field	MU-079-02
SU-079-03	Southeast field	MU-079-03
SU-079-04	West field	MU-079-04

5.3.2 Soil Monitoring, Sampling, and Analyses

Monitoring Point Serial Number	Sample Type	Sample Frequency	Constituents (Units in mg/kg Soil Unless Otherwise Specified)
SU-079-02 SU-079-03 SU-079-04 ^a	Composite samples ^b	Annually (April)	–Electrical conductivity (µmhos/cm) –Nitrate-nitrogen –Ammonium nitrogen –pH – Plant available phosphorus (use Olsen method for soils with pH 6.5 or greater, use Bray method if soil pH is less than 6.5)
SU-079-02 SU-079-03 SU-079-04 ^a	Composite samples ^b	First and last year of permit (April)	–SAR –DTPA-Fe –DTPA-Mn

- a. Sampling is not required on the west field (SU-079-04) until after this field is approved for recycled water land application by DEQ (See CA-079-03).
- b. The number of sample locations specified in the PO or QAPP for each SU shall be sampled. At each location, samples shall be obtained from three depths: 0–12 inches; 12–24 inches; and 24–36 inches or refusal. The samples obtained from each depth shall be composited by depth to yield three composite samples for each soil monitoring unit; one composite sample for each depth.

5.4 Plant Tissue Monitoring

5.4.1 Crop Harvest Monitoring

Associated Hydraulic Management Units	Sample Type	Sample Frequency	Reporting Parameters ^a
MU-079-02 MU-079-03 MU-079-04 ^b	Harvested portion, each crop, each MU	Each harvest	<ul style="list-style-type: none"> - Crop type - Harvest date - Sample collection date - Harvest acreage (acres) - As-harvested ('wet') yield in customary harvested units (tons, bushels, cwt, etc.) - As-harvested (field) moisture content (%) - Dry yield (lb)

- a. Documentation of reported yields shall be provided for each harvest from each MU.
- b. Sampling is not required on the west field (MU-079-04) until after this field is approved for recycled water land application by DEQ (See CA-079-03).

5.4.2 Plant Tissue Monitoring

Associated Hydraulic Management Units	Sample Type	Sample Frequency	Parameters ^a
MU-079-02 MU-079-03 MU-079-04 ^b	Harvested portion, each crop, each MU	Each harvest	<ul style="list-style-type: none"> - Moisture content (%); - Total Kjeldahl nitrogen (%); - Nitrate nitrogen, as N (ppm) - Phosphorus as P (ppm) - Ash (%)

- a. Report dry-basis results for all parameters except lab moisture content.
- b. Sampling is not required on the west field (MU-079-04) until after this field is approved for recycled water land application by DEQ (See CA-079-03).

5.5 Lagoon Information

Serial number	Description	Surface Area, acres	Maximum Operating Volume, MG	Liner Type
LG-079-01	Lagoon Cell #1	0.55	0.86	Plastic/HDPE
LG-079-02	Lagoon Cell #2	1.52	2.11	Plastic/HDPE
LG-079-03	Lagoon Cell #3	1.05	1.71	Plastic/HDPE
LG-079-04	Lagoon Cell #4	1.23	1.56	Plastic/HDPE

6. Reporting Requirements

6.1 Annual Report Requirements

The permittee shall submit to DEQ an Annual Report prepared by a competent environmental professional covering the previous reporting year.

6.1.1 Due Date

The Annual Report is due no later than January 31st of each year, which shall cover the previous reporting year.

6.1.2 Required Contents

The Annual Report shall include the following:

1. A brief interpretive discussion of all required monitoring data. The report shall address data quality objectives, validation, and verification; permit compliance; and reuse facility environmental impacts. The reporting year for this permit is specified in section 4.5.
2. Results of the required monitoring as described in section 5 of this permit. If the permittee monitors any parameter for compliance purposes more frequently than required by this permit, the results of this monitoring shall be included in the calculation and reporting of the data submitted in the Annual Report. The report shall present all monitoring data in organized data summary tables to expedite review.
3. Status of all work described in section 3 of this permit.
4. Results of all backflow testing, repairs, and replacements required by section 9.1.1 of this permit.
5. Discussion of major maintenance activities such as major equipment replacement, lagoon liner maintenance, and wastewater treatment and reuse facility maintenance.
6. A summary of all noncompliance events that occurred during the reporting year. Examples of noncompliance events that must be discussed include, but are not limited to: complaints, missed monitoring events, incorrect monitoring dates or frequencies, dry monitoring wells, uncontained spills causing runoff, construction without DEQ engineering plan approval, construction without engineering inspection, and reporting incorrect acreage.

7. Submittal of the calculations and observations for hydraulic management units specified in the table below.
8. All laboratory analytical reports, chain of custody forms, and crop yield documentation.
9. The parameters in the following table:

Monitoring Point Serial Number	Parameter (Calculate for each MU)	Units
MU-079-02 MU-079-03 MU-079-04	Recycled water loading rate	Million gallons/month Inches/month
	Supplemental irrigation water loading rate	Million gallons/month Inches/month
	Irrigation water requirement (IWR) for each crop grown	Inches/month Inches/GS
	COD loading rate: growing season seasonal average	Pounds/acre-day
	Recycled water nitrogen, phosphorus, and NVDS loading rates	Pounds/acre-year
	Fertilizer nitrogen and phosphorus application rates, reported as elemental N and P	Pounds/acre-year
	Crop harvest and yield Report each harvest and the annual totals for each MU.	Crop types harvested Total harvested area (acres) Total 'wet' yield (lb/yr, lb/acre-yr) Total 'dry' yield (lb/yr, lb/acre-yr)
	Crop nitrogen, phosphorus, and ash removal rates (dry-basis) Report each harvest and the annual totals for each MU.	Pounds-N/acre-year Pounds-P/acre-year Pounds Ash/acre-year
Other Reporting Requirements		
a. Keep records at the facility and have records available for DEQ inspection.		

6.1.3 Submittal

All applications, annual reports, or information submitted to DEQ as required by this permit shall be signed and certified as follows:

1. Permit applications shall be signed as follows:
 - a. For a corporation: by a responsible corporate officer;

- b. For a partnership or sole proprietorship: by a general partner or the proprietor, respectively;
 - c. For a municipality, state, federal, Indian tribe, or other public agency: by either the principal executive officer or ranking elected official.
2. Annual reports and other information requested by DEQ shall be signed by the responsible official or by a duly authorized representative of that person. A person is a duly authorized representative only if:
- a. The authorization is made in writing by the responsible official;
 - b. The authorization specifies either an individual or position having responsibility for the overall operation of the regulated facility, such as the position of plant manager, superintendent, position of equivalent responsibility, or an individual having overall responsibility for environmental matters for the company; and
 - c. The written authorization is submitted to DEQ.

Submit the annual report to the following DEQ regional office at this address:

Engineering Manager
Idaho Department of Environmental Quality
Twin Falls Regional Office
650 Addison Avenue West, Suite 110
Twin Falls, ID 83301
(208) 736-2190

The annual report shall include the following certification statement and be signed, dated, and certified by the permittee's Responsible Official or Authorized Representative:

"I certify under penalty of law that this report and all attachments were prepared under my direction or supervision and the data and information presented in this report was collected, evaluated and prepared in conformance with the Quality Assurance Project Plan required by the permit. I also certify that the information provided in this submission is, to the best of my knowledge, true, accurate and complete and I acknowledge that knowing submission of false or incomplete information may result in permit revocation as provided for in IDAPA 58.01.17.920.01 or other enforcement action as provided for under Idaho law."

6.2 Emergency and Noncompliance Reporting

Report noncompliance incidents to the DEQ Twin Falls regional office. See section 6.1.3 for the Twin Falls regional office phone number.

In case of emergencies, call the emergency 24-hour number at 1-800-632-8000 and the DEQ Twin Falls regional office.

See Section 8, "Standard Permit Conditions," and IDAPA 58.01.17.500.06 for reporting requirements for facilities.

All instances of unpermitted discharges of wastewater to surface waters of the United States shall also be reported to the United States Environmental Protection Agency (EPA) by telephone within 24 hours from the time the permittee becomes aware of the discharge and in writing within 5 days at the following address:

NPDES/Stormwater Coordinator, USEPA Idaho Operations Office
950 W. Bannock, Suite 900
Boise, ID 83702
(208) 378-5746 or (208) 378-5744 and EPA Hot Line: (206) 553-1846

7. Reserved

8. Standard Permit Conditions

The following standard permit conditions are included as terms of this permit as required by the "Recycled Water Rules," (IDAPA 58.01.17.500).

500. STANDARD PERMIT CONDITIONS.

The following conditions shall apply to and be included in all permits. (4-1-88)

01. Compliance Required. The permittee shall comply with all conditions of the permit. (4-1-88)

02. Renewal Responsibilities. If the permittee intends to continue operation of the permitted facility after the expiration of an existing permit, the permittee shall apply for a new permit in accordance with these rules. (4-1-88)

03. Operation of Facilities. The permittee shall at all times properly maintain and operate all structures, systems, and equipment for treatment, control and monitoring, which are installed or used by the permittee to achieve compliance with the permit or these rules. (4-1-88)

04. Provide Information. The permittee shall furnish to the Director within a reasonable time, any information including copies of records, which may be requested by the Director to determine whether cause exists for modifying, revoking, re-issuing, or terminating the permit, or to determine compliance with the permit or these rules. (4-1-88)

05. Entry and Access. The permittee shall allow the Director, consistent with Title 39, Chapter 1, Idaho Code, to: (4-1-88)

a. Enter the permitted facility. (4-1-88)

b. Inspect any records that must be kept under the conditions of the permit. (4-1-88)

c. Inspect any facility, equipment, practice, or operation permitted or required by the permit. (4-1-88)

d. Sample or monitor for the purpose of assuring permit compliance, any substance or any parameter at the facility. (4-1-88)

06. Reporting. The permittee shall report to the Director under the circumstances and in the manner specified in this section: (4-1-88)

a. In writing at least thirty (30) days before any planned physical alteration or addition to the permitted facility or activity if that alteration or addition would result in any significant change in information that was submitted during the permit application process. When the alteration or addition results in a need for a major modification, such alteration or addition shall not be made prior to Department approval issued in accordance with these rules. (4-7-11)

b. In writing thirty (30) days before any anticipated change which would result in noncompliance with any permit condition or these rules. (4-1-88)

c. Orally within twenty-four (24) hours from the time the permittee became aware of any noncompliance which may endanger the public health or the environment at telephone numbers provided in the permit by the Director. (4-1-88)

d. In writing as soon as possible but within five (5) days of the date the permittee knows or should know of any noncompliance unless extended by the Department. This report shall contain: (4-1-88)

i. A description of the noncompliance and its cause; (4-1-88)

ii. The period of noncompliance including to the extent possible, times and dates and, if the noncompliance has not been corrected, the anticipated length of time it is expected to continue; and (4-7-11)

iii. Steps taken or planned, including timelines, to reduce or eliminate the continuance or reoccurrence of the noncompliance. (4-7-11)

e. In writing as soon as possible after the permittee becomes aware of relevant facts not submitted or incorrect information submitted, in a permit application or any report to the Director. Those facts or the correct information shall be included as a part of this report. (4-1-88)

07. Minimize Impacts. The permittee shall take all necessary actions to eliminate and correct any adverse impact on the public health or the environment resulting from permit noncompliance. (4-1-88)

08. Compliance with "Ground Water Quality Rule." Permits issued pursuant to these rules shall require compliance with IDAPA 58.01.11, "Ground Water Quality Rule." (4-7-11)

9. General Permit Conditions

The following general permit conditions are identical to the cited rules at the time of issuance and are enforceable as part of this permit. Note that the rules cited in this section, and elsewhere in this permit, are supplemented by the rules themselves. Rules applicable to your facility are enforceable whether or not they appear in this permit.

9.1 Operations

9.1.1 Backflow Prevention

Reuse facilities with existing or planned cross-connections or interconnections between the recycled water system and any water supply (potable or non-potable) or surface water, shall have backflow prevention assemblies, devices, or methods as required by applicable rule or as specified in this permit and approved by DEQ.

For public water systems, backflow assemblies shall meet the requirements of IDAPA 58.01.08.543. Assemblies shall be adequately maintained and shall be tested annually by a certified backflow assembly tester, and repaired or replaced as necessary to maintain operational status.

For domestic water supply wells, backflow prevention devices shall meet the requirements of IDAPA 07.02.04 and shall be adequately operated and maintained.

Irrigation water supply wells shall meet the requirements of IDAPA 37.03.09.36 for preventing any waste or contamination of the ground water resource. Backflow prevention assemblies or devices used to protect the ground water shall be adequately operated and maintained.

Discharge of recycled water to surface water is authorized by the EPA NPDES program. An NPDES permit is required for any discharge to surface water and backflow prevention shall be implemented to prevent any unauthorized discharge. Backflow prevention assemblies or devices used to protect surface water shall be adequately operated and maintained.

Records of all testable backflow assembly test results, repairs, and replacements shall be kept at the reuse facility along with other operational records, and shall be discussed in the Annual Report and made available for inspection by DEQ. Other approved means of backflow prevention, such as siphons and air-gap structures that cannot be tested, shall be maintained in operable order.

9.1.2 Restricted to Premises

Wastewaters or recharge waters applied to the land surface must be restricted to the premises of the application site. Wastewater discharges to surface water that require a permit under the Clean Water Act must be authorized by the United States Environmental Protection Agency (IDAPA 58.01.16.600.02).

9.1.3 Health Hazards, Nuisances, and Odors Prohibited

Health hazards, nuisances, and odors are prohibited as follows:

- Wastewater must not create a public health hazard or nuisance condition (IDAPA 58.01.16.600.03).
- No person shall allow, suffer, cause or permit the emission of odorous gases, liquids, or solids into the atmosphere in such quantities as to cause air pollution (IDAPA 58.01.01.776.01).
- Air Pollution. The presence in the outdoor atmosphere of any air pollutant or combination thereof in such quantity of such nature and duration and under such conditions as would be injurious to human health or welfare, to animal or plant life, or to property, or to interfere unreasonably with the enjoyment of life or property (IDAPA 58.01.01.006.06).

9.1.4 Solids Management

Biosolids are the nutrient-rich organic materials resulting from the treatment of sewage sludge. When treated and processed, sewage sludge becomes biosolids which can be safely recycled and applied as fertilizer to sustainably improve and maintain productive soils and stimulate plant growth.

Biosolids generated from sewage sludge are regulated by EPA under 40 CFR Part 503 and require a DEQ approved sludge disposal plan as outlined in IDAPA 58.01.16.650. Contact DEQ prior to application of biosolids at any permitted reuse facility.

Sludge is the semi-liquid mass produced and removed by wastewater treatment processes. This does not include grit, garbage, and large solids.

Sludge is generated by wastewater treatment processes at municipal and industrial facilities.

Solid Waste is any garbage or refuse, sludge from a waste water treatment plant, water supply treatment plant, or air pollution control facility and other discarded material including solid, liquid, semi-solid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations and from community activities, but does not include solid or dissolved materials in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under Section 402 of the Federal Water Pollution Control Act, as amended or source, special nuclear, or by-product material as defined by the Atomic Energy Act of 1954, as amended.

Solid waste does not include inert wastes, manures and crop residues ultimately returned to the soils at agronomic rates, and any agricultural solid waste which is managed and regulated pursuant to rules adopted by the Idaho Department of Agriculture. DEQ reserves the right to use existing authorities to regulate agricultural waste that impacts human health or the environment.

Solid waste is regulated under "Solid Waste Management Rules", IDAPA 58.01.06. Wastes otherwise regulated by DEQ (i.e. this permit) are not regulated under 58.01.06.

Waste Solids include sludge and wastes otherwise regulated by DEQ in accordance with IDAPA 58.01.06.001.03.a.xii. Waste solids may include vegetative waste, silt and mud containing organic matter, and other non-inert solid wastes.

Inert wastes are defined as non-combustible, nonhazardous, and non-putrescible solids wastes that are likely to retain their physical and chemical structure and have a deminimis potential to generate leachate under expected conditions of disposal, which includes resistance to biological attack.

Waste solids require a DEQ approved sludge disposal plan as outlined in IDAPA 58.01.16.650.

9.1.5 Temporary Cessation of Operations and Closure (IDAPA 58.01.17.801)

Temporary cessation of operations and closure must be addressed as follows:

01. Temporary Cessation. A permittee shall implement any applicable conditions specified in the permit for temporary cessation of operations. When the permit does not specify applicable temporary cessation conditions, the permittee shall notify the Director prior to a temporary cessation of operations at the facility greater than sixty (60) days in duration and any cessation not for regular maintenance or repair. Cessation of operations necessary for regular maintenance or repair of a duration of sixty (60) days or less are not required to notify the Department under this section. All notifications required under this section shall include a proposed temporary cessation plan that will ensure the cessation of operations will not pose a threat to human health or the environment. (4-7-11)

02. Closure. A closure plan shall be required when a facility is closed voluntarily and when a permit is revoked or expires. A permittee shall implement any applicable conditions specified in the permit for closure of the facility. Unless otherwise directed by the terms of the permit or by the Director, the permittee shall submit a closure plan to the Director for approval at least ninety (90) days prior to ceasing operations. The closure plan shall ensure that the closed facility will not pose a threat to human health and the environment. Closure plan approval may be conditioned upon a permittee's agreement to complete such site investigations, monitoring, and any necessary remediation activities that may be required. (4-7-11)

9.1.6 Plan of Operation (IDAPA 58.01.17.300.05)

The PO must comply with the following:

05. Reuse Facility Operation and Maintenance Manual or Plan of Operations. A facility's operation and maintenance manual must contain all system components relating to the reuse facility in order to comply with IDAPA 58.01.16 "Wastewater Rules," Section 425. Manuals and manual amendments are subject to the review and approval provision therein. In addition to the content required by IDAPA 58.01.16.425, manuals for reuse facilities shall include, if applicable: operation and management responsibility, permits and standards, general plant description, operation and control of unit operations, land application site maps, wastewater characterization, cropping plan, hydraulic loading rate, constituent loading rates, compliance activities, seepage rate testing, site management plans, monitoring, site operations and maintenance, solids handling and processing, laboratory testing, general maintenance, records and reports, store room and inventory, personnel, an emergency operating plan, and any other information required by the Department. (4-7-11)

9.1.7 Ten-Year Lagoon Seepage Testing (IDAPA 58.01.16.493.02)

Seepage testing must meet the following requirements:

c. **Subsequent Tests.** All lagoons covered under these rules must be seepage tested by an Idaho licensed professional engineer, an Idaho licensed professional geologist, or by individuals under their supervision every ten (10) years after the initial testing. (5-8-09)

e. **Procedures for Performing a Seepage Test.** The procedure for performing a seepage test or alternative analysis must be approved by the Department, and the test results must be submitted to the Department. If an existing

lagoon has passed a seepage test before April 15, 2012 and submitted the results to the Department, the owner of that lagoon has ten (10) years from the date of the testing to comply with this requirement. (5-8-09)

9.1.8 Ground Water Quality (IDAPA 58.01.11)

The permittee shall comply with the requirements of "Ground Water Quality Rule" (IDAPA 58.01.11).

9.2 Administrative

Requirements for administration of the permit are defined as follows.

9.2.1 Permit Modification (IDAPA 58.01.17.700)

01. Modification of Permits. A permit modification may be initiated by the receipt of a request for modification from the permittee, or may be initiated by the Department if one (1) of more of the following causes for modification exist: (4-7-11)

a. Alterations. There are material and substantial alterations or additions to the permitted facility or activity which occurred after permit issuance which justify the application of permit conditions that are different or absent in the existing permit. (4-7-11)

b. New standards or regulations. The standards or regulations on which the permit was based have been changed by promulgation of amended standards or regulations or by judicial decision after the permit was issued. (4-7-11)

c. Compliance schedules. The Department determines good cause exists for modification of a compliance schedule or terms and conditions of a permit. (4-7-11)

d. Non-limited pollutants. When the level of discharge of any pollutant which is not limited in the permit exceeds the level which may cause an adverse impact to surface or ground waters. (4-7-11)

e. To correct technical mistakes, such as errors in calculation, or mistaken interpretations of law made in determining permit conditions. (4-7-11)

f. When a treatment technology proposed, installed, and properly operated and maintained by the permittee fails to achieve the requirements of the permit.

9.2.2 Permit Transferable (IDAPA 58.01.17.800)

01. General. A permit may be transferred only upon approval of the Department. No transfer is required for a corporate name change as long as the secretary of state can verify that a change in name alone has occurred. An attempted transfer is not effective for any purpose until approved in writing by the Department. (4-7-11)

9.2.3 Permit Revocation (IDAPA 58.01.17.920)

01. Conditions for Revocation. The Director may revoke a permit if the permittee violates any permit condition or these rules, or the Director becomes aware of any omission or misrepresentation of condition or information relied upon when issuing the permit. (4-7-11)

02. Notice of Revocation. Except in cases of emergency, the Director shall issue a written notice of intent to revoke to the permittee prior to final revocation. Revocation shall become final within thirty-five (35) days

of receipt of the notice by the permittee, unless within that time the permittee requests an administrative hearing in writing. The hearing shall be conducted in accordance with IDAPA 58.01.23, Rules of Administrative Procedure Before the Board of Environmental Quality.” (5-3-03)

03. Emergency Action. If the Director finds the public health, safety or welfare requires emergency action, the Director shall incorporate findings in support of such action in a written notice of emergency revocation issued to the permittee. Emergency revocation shall be effective upon receipt by the permittee. Thereafter, if requested by the permittee in writing, the Director shall provide the permittee a revocation hearing and prior notice thereof. Such hearings shall be conducted in accordance with IDAPA 58.01.23, Rules of Administrative Procedure Before the Board of Environmental Quality.” (3-15-02)

04. Revocation and Closure. A permittee shall perform the closure requirements in a permit, the closure requirements of these rules, and complete all closure plan activities notwithstanding the revocation of the permit. (4-7-11)

9.2.4 Violations (IDAPA 58.01.17.930)

Any person violating any provision of these rules or any permit or order issued thereunder shall be liable for a civil penalty not to exceed ten thousand dollars (\$10,000) or one thousand dollars (\$1,000) for each day of a continuing violation, whichever is greater. In addition, pursuant to Title 39, Chapter 1, Idaho Code, any willful or negligent violation may constitute a misdemeanor. (4-1-88)

9.2.5 Severability

The provisions of this permit are severable, and if a provision or its application is declared invalid or unenforceable for any reason, that declaration will not affect the validity or enforceability of the remaining provisions.

10. Other Applicable Laws

DEQ may refer enforcement of the following provisions to the state agency authorized to enforce that rule. The permittee shall comply with all applicable provisions identified in this section, as well as all other applicable federal, state, and local laws, statutes, and rules.

10.1 Owner Responsibilities for Well Use and Maintenance

10.1.1 Well Use

The well owner must not operate any well in a manner that causes waste or contamination of the ground water resource. Failure to operate, maintain, knowingly allow the construction of any well in a manner that violates these rules, or failure to repair or properly decommission (abandon) any well as herein required will subject the well owner to civil penalties as provided by statute. See IDAPA 37.03.09.036.01 and consult the Idaho Department of Water Resources (IDWR) for more information.

10.1.2 Well Maintenance

The well owner must maintain the well to prevent waste or contamination of ground waters through leaky casings, pipes, fittings, valves, pumps, seals, or through leakage around the outside of the casings, whether the leakage is above or below the land surface. Any person owning or

controlling a noncompliant well must have the well repaired by a licensed well driller under a permit issued by the IDWR director in accordance with the applicable rules. See IDAPA 37.03.09.036.02 and consult IDWR for more information.

10.1.3 Wells Posing a Threat to Human Health and Safety or Causing Contamination of the Ground Water Resource

The well owner must have any well shown to pose a threat to human health and safety or cause contamination of the ground water resource immediately repaired or decommissioned (abandoned) by a licensed well driller under a permit issued by the IDWR director in accordance with the applicable rules. See IDAPA 37.03.09.036.06 and consult the IDWR for more information.

11. Site Maps

11.1 Figure 1. Site Location Map (prepared by DEQ)

11.2 Figure 2. Reuse Site and Lagoons (prepared by DEQ)

